


FDF RACK MOUNTED

FDF 1U (RACK MOUNT sliding tray)



FDF 12-24 Port 1U

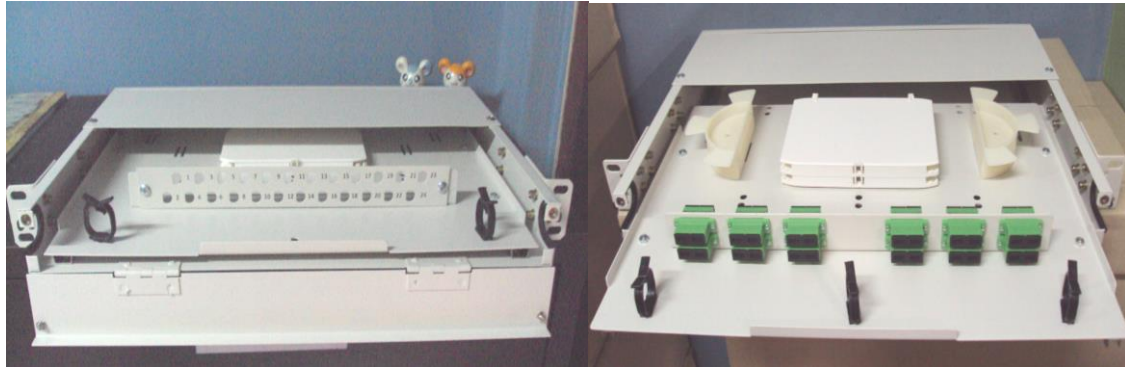

1 : 16 Splitter Rack 1U

1 : 8 Splitter Rack 1U

The rack mount enclosure is designed for indoor and FTTx for high density patching application. The rack enclosure is available for 12, 24 fibers in the standard beige color.

The sliding tray have ball bearing slide hanging which easy to push or pull and also they provide the patching area for patch splice. The splicing tray cab splice 12 fibers/ each tray, easy to add the splice tray.

Features:

- 19" or 21" rack mount
- Terminates 12, 24 fibers and FTTx Splitter 1 : 8 SC/APC Connector
- Provides easy access for Connector FC, SC, LC, ST, E2000 panel.
- Pullout splicing tray for convenient splicing and field termination
- Equipped with cable management
- Removable door with life-off hinges
- Material – EG Steel with powder coating
- Size : MM : 12 & 24 port (1U) = 430(W) x 45(H) x 30(D)

FDF RACK MOUNTED

Product Code


CODE	Product Type	Capacity	Packing
JK RM1U0012	ODF 12P Rack Mount 1U	12 Fibers	1 set/box
JK RM1U0024	ODF 24P Rack Mount 1U	24 Fibers	1 set/box

SPLICE PROTECTIVE SLEEVE



Splice sleeve for fiber-optic fusion splices can be used to rebuild the primary coating for fiber to provide protection at the fusion joint area.

Structure : Shrinkable sleeve
Stainless steel rod



Generis Specifications :

Description	Typical diameter after heating Φ (mm)	Fusion Tube Φ (mm)	Length of the stainless steel rod l(mm)	Length of Sleeve l(mm)
45 mm	2.5	1.3	40	45
60 mm	2.5	1.3	55	60

Change of temperature	Temperature Cycle Cycles 1 cycle		- 40°C to +85°C 10 cycles 6 hr.
-----------------------	--	--	---------------------------------------